

DISH NETWORK DVR INSTALLATION


Step I: Cable/Q-Box Installation

1. Place the Q-Box near the satellite receiver, either on the floor behind an entertainment center, or on a shelf next to the satellite receiver. Q-Box units should never be dangled or hung from a wall plate, or from the back of the satellite receiver or TV.
2. Connect the coaxial cable from the wall (or splitter) to the **INPUT** of the Q-Box.
3. Connect the **Receiver** connection of the Q-Box to the **Satellite In** of the receiver.

Note: If installing a Dual-tuner receiver, install one Q-Box for each tuner in the receiver.



4. Plug in the power cord for the receiver.

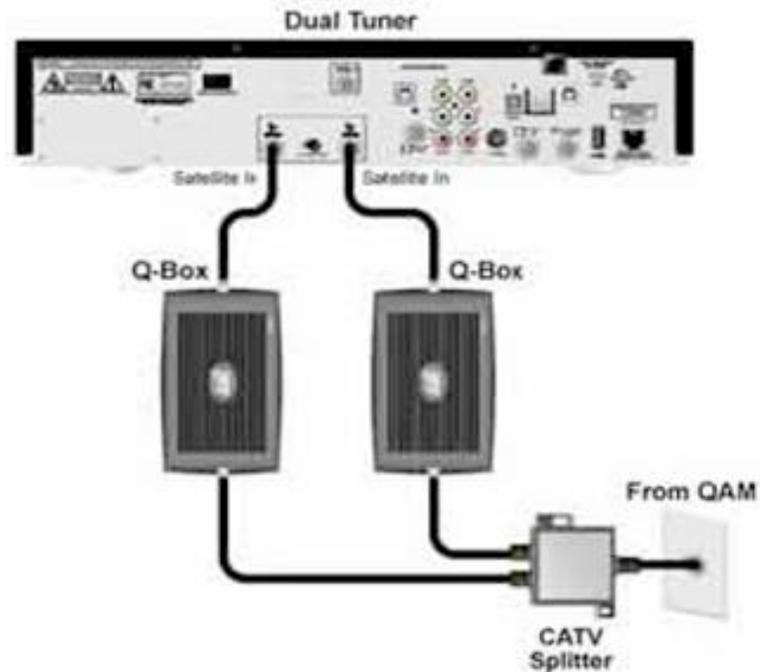


Step II: Connect Receiver to TV

1. HDMI
2. Component
3. RCA


Receiver to TV via HDMI




622, 622 Hz, 722, 722k - to TV via HDMI

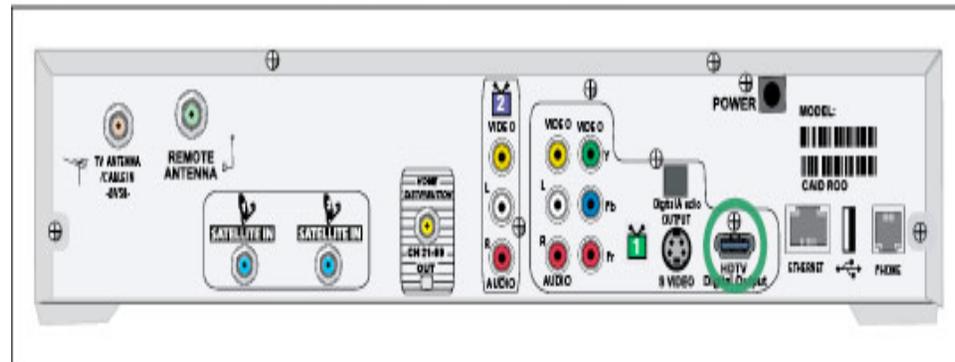


Receiver to TV via Component

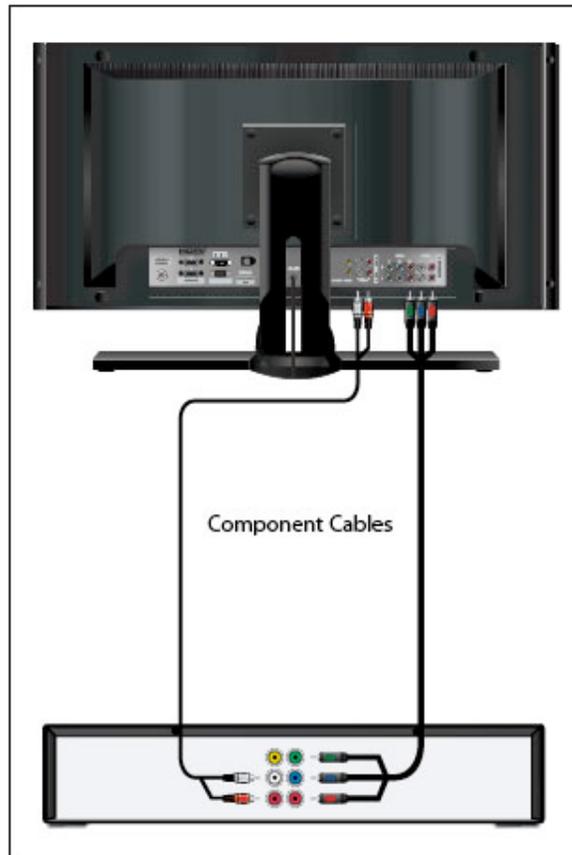


622, 622 hz, 722, 722k - to TV via Component

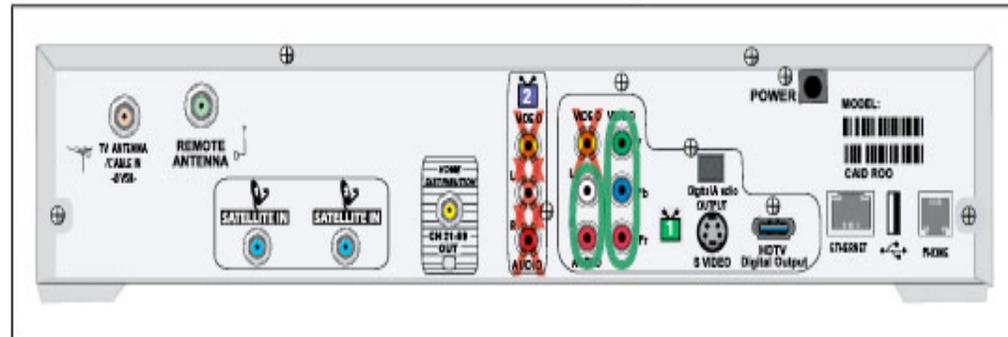

Receiver to TV via RCA

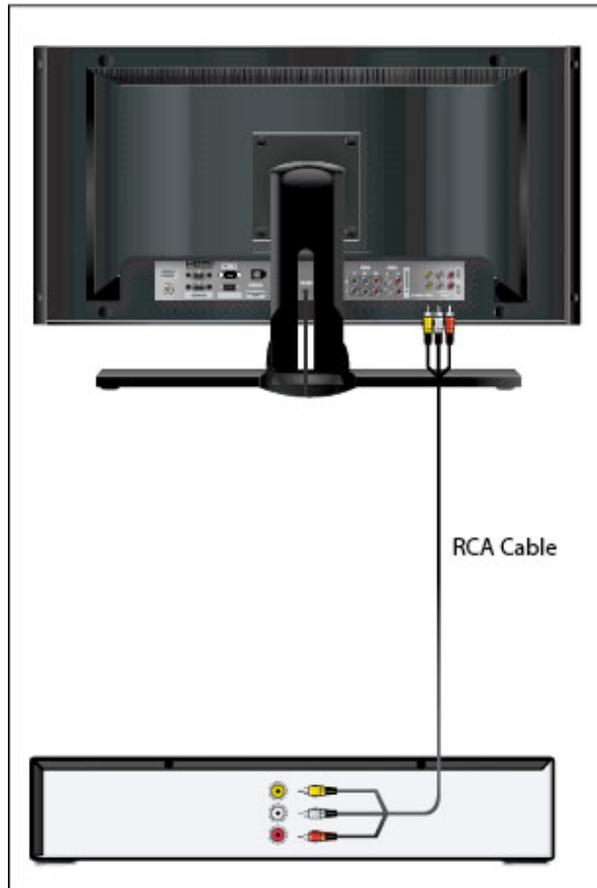

622, 622 Hz, 722, 722k - to TV via RCA

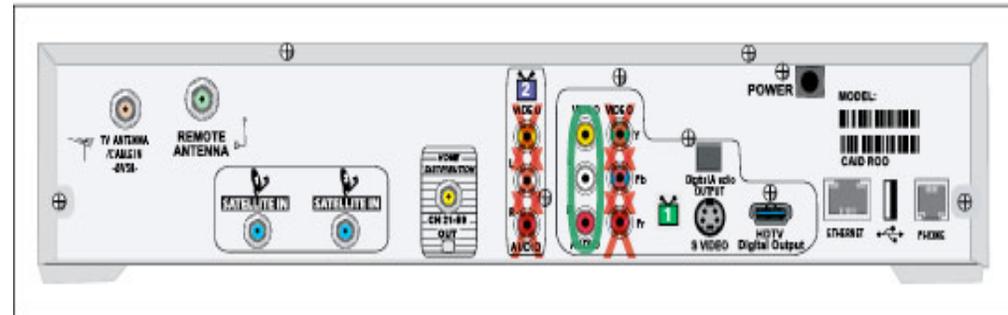

Step III: Perform QAM Scan on Receiver

1. Press **Menu** on your Dish Network remote control
2. Select **System Setup** on the Menu screen by pressing **6** on your Dish remote.
3. Select **Installation** on the System Setup screen by pressing **1** on your Dish remote.
4. Select **QAM Setup** on the Installation screen by pressing **1** on your Dish remote.
5. Make sure the **Scan Range** on the QAM setup screen says: **From: 057 To: 861**.
If the scan range is correct, then skip to step 6, if it does not, continue to the following steps:
 - a. Highlight the **From** or **To** field (depending on which one needs to be changed) using the left or right arrows on your Dish Network remote control.
 - b. Once highlighted, use the up or down arrows to change to the correct number (**057** for the **From** field, **861** for the **To** field)
6. Once the **Scan Range** has the correct range, highlight the **SCAN** field on the right side of the screen using the arrows on your Dish remote and press select on the Dish remote.
7. Once the scan is complete, highlight **DONE** using the arrows on your Dish remote and press select on your Dish remote
8. After that, press the **View Live TV** button or continuously hit cancel on your Dish Network remote control until you are out of the menu

If you have any additional problems installing the receiver, please call our **technical support** at:

[\(305\) 507-7777](tel:3055077777) option 3 or toll free at [\(888\) 787-8722](tel:8887878722) option 3.